查询3FSH91D00供应商

multimec® 3F + 1D/1E/1F



Technical Data:

- through-hole or SMD
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range:
  low temp: -40/+115ºC
  high temp: -40/+160ºC

Dimensions (through-hole)

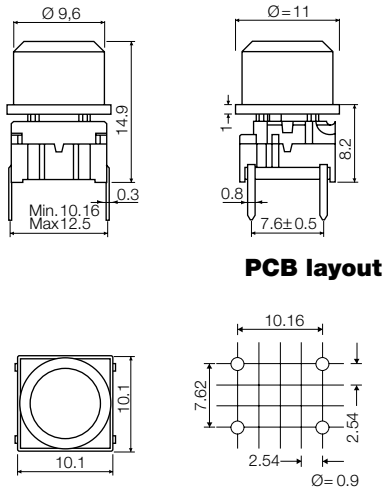

Dimensions (w/LED)

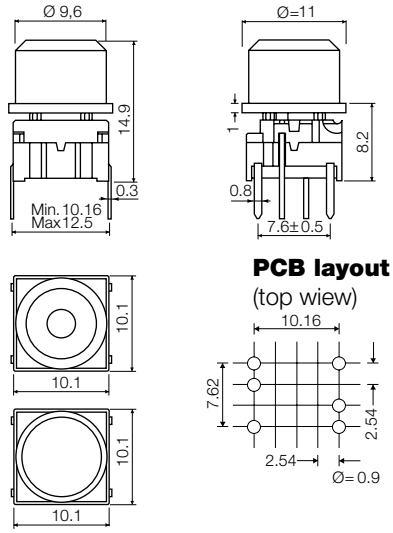

Dimensions (SMD)

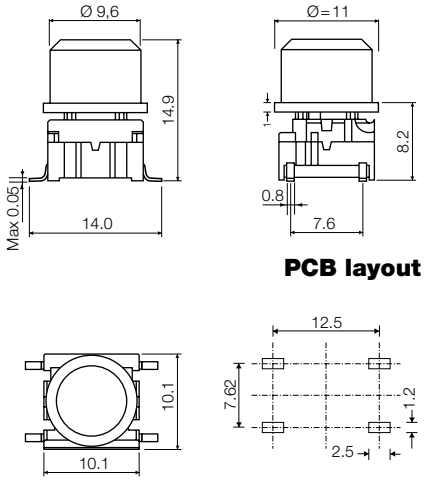

HOW TO ORDER

3 F			+	1 D	
Switch	**Mounting** **T** through-hole **S** surface mount	**L 6** low temp. **H 9** high temp.		**Cap**	**00** blue **02** green **03** grey **04** yellow **06** white **08** red **09** black **30** ultra blue **40** dusty blue **42** aqua blue **32** mint green **33** tele grey **34** melon **38** noble red **50** metal dark blue **53** metal light grey **57** metal dark grey **58** metal bordeaux

Standard versions:
3FTL6
3FTH9
3FSH9
3FSH9R

3 F	T			+		1 1	
Switch	**Mounting** **T** through-hole	**L 6** low temp. **H 9** high temp.	**LED** **00** blue **20** green **40** yellow **80** red **2040** green/yellow **8020** red/green **8040** red/yellow		**Cap 1D** **Cap 1E** **Cap 1F**	transparent	**Lens** **00** blue **02** green **03** grey **04** yellow **06** white **08** red **09** black	**1** transparent **2** green **4** yellow **8** red

Standard versions:
3FTL600
3FTL620
3FTL640
3FTL680
3FTL62040
3FTL68020
3FTL68040

Ordering example: 3FTL620 + 1E032

mec a/s jan. 2003

mec · Industriparken 23 · P.o. Box 26 · DK-2750 Ballerup · Denmark
Tel.: +45 44 97 33 66 · Fax: +45 44 68 15 14 · Web: www.mec.dk. · E-mail: danmec@mec.dk

multimec® 3F + 1K + 2K

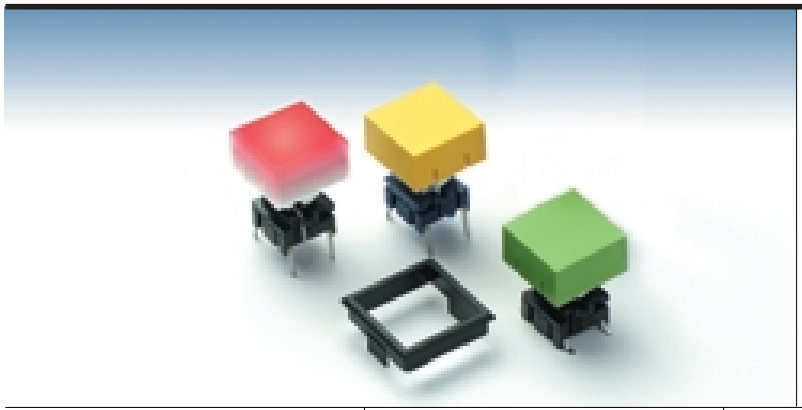



Technical Data:

- through-hole or SMD
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range:
  low temp: -40/+115ºC
  high temp: -40/+160ºC

Dimensions (through-hole)



PCB layout



Dimensions (w/LED)



PCB layout
(top view)



Dimensions (SMD)



PCB layout



Dimensions (Bezel)
(Optional)

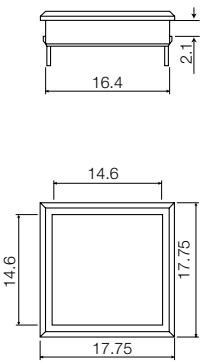

HOW TO ORDER

3 F **Switch**

Mounting
T through-hole
S surface mount

L 6 low temp.
H 9 high temp.

+

1 K **1 6** **Cap**
00 blue
02 green
03 grey
04 yellow
06 white
08 red
09 black

+

2 K **Bezel**
03 grey
06 white
08 red
09 black

Standard versions:
3FTL6
3FTH9
3FSH9
3FSH9R

3 F **Switch**

T **Mounting**
T through-hole

L 6 low temp.
H 9 high temp.

LED
23 green
44 yellow
88 red

+

1 K 1 1 1 6 **Cap** transparent

+

2 K **Bezel**
03 grey
06 white
08 red
09 black

Standard versions:
3FTL622
3FTL644
3FTL688

Ordering example: 3FTL688 + 1K1116

mec Industriparken 23 · P.o. Box 26 · DK-2750 Ballerup · Denmark
Tel.: +45 44 97 33 66 · Fax: +45 44 68 15 14 · E-mail: danmec@mec.dk · www.mec.dk.

mec a/s may 2003

multimec® 3F + 1P/1Q/1R

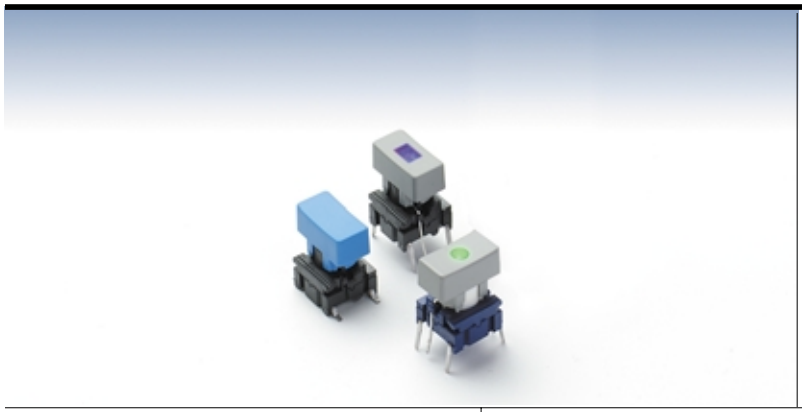



Technical Data:
- through-hole or SMD
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range:
  low temp: -40/+115ºC
  high temp: -40/+160ºC

Dimensions (through-hole)

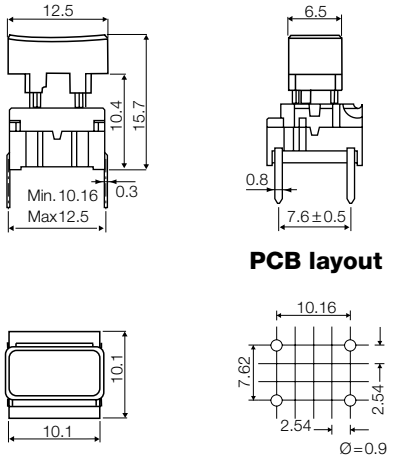

PCB layout

Dimensions (w/LED)

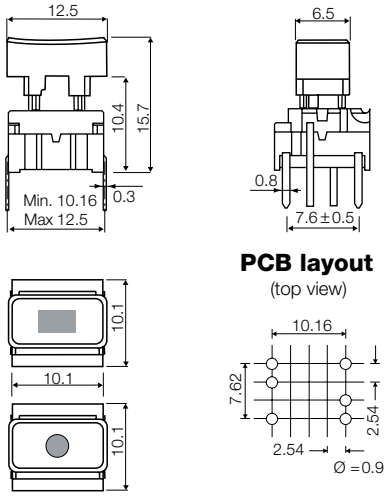

PCB layout
(top view)

Dimensions (SMD)

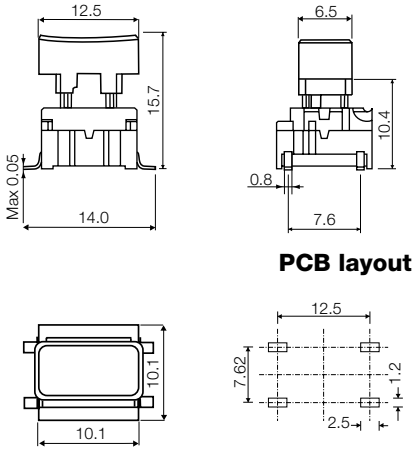

PCB layout

How to order

3 F			+	1 P	
Switch	**Mounting** **T** through-hole **S** surface mount	**L 6** low temp. **H 9** high temp.		**Cap**	**00** blue **02** green **03** grey **04** yellow **06** white **08** red **09** black

Standard versions:
3FTL6
3FTH9
3FSH9
3FSH9R

3 F	T			+			1
Switch	**Mounting** **T** through-hole	**L 6** low temp. **H 9** high temp.	**LED** **00** blue **20** green **40** yellow **80** red **2040** green/yellow **8020** red/green **8040** red/yellow		**1Q**	**00** blue **03** grey **08** red **09** black	**Lens** **1** transparent

1R

Standard versions:
3FTL600
3FTL620
3FTL640
3FTL680
3FTL62040
3FTL68020
3FTL68040

Ordering example: 3 FTL680 + 1Q091

mec a/s jan. 2003

mec · Industriparken 23 · P.o. Box 26 · DK-2750 Ballerup · Denmark
Tel.: +45 44 97 33 66 · Fax: +45 44 68 15 14 · Web: www.mec.dk. · E-mail: danmec@mec.dk

multimec® RAS + 1D/1K/1P/1S

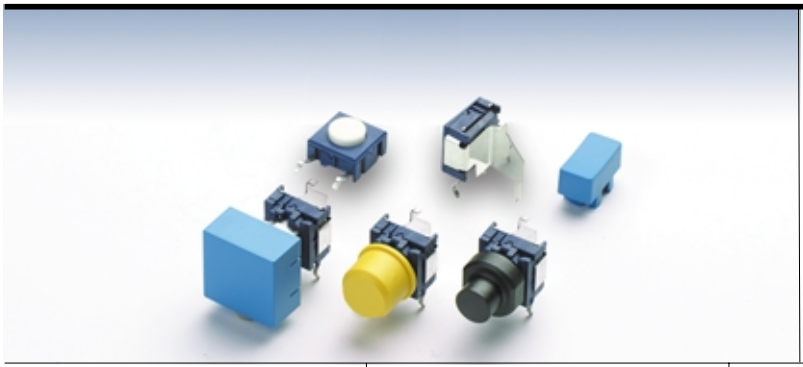



Technical Data:

- through-hole only
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range:
  low temp: -40/+115ºC

Dimensions 1D

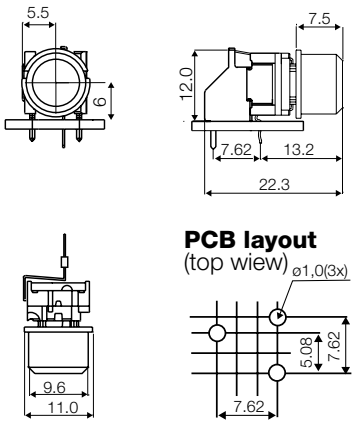

Dimensions 1K

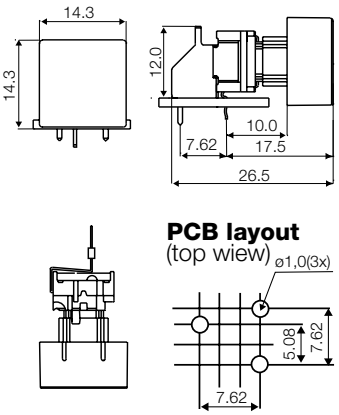

Dimensions 1P

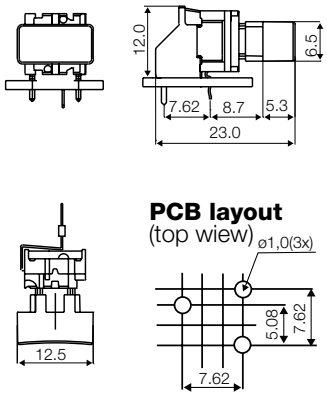

Dimensions 1S

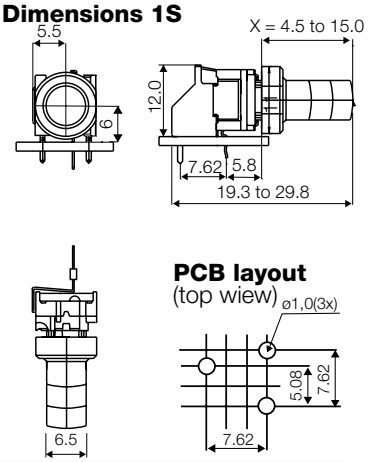

HOW TO ORDER

3 F **Switch**

T **Mounting**
T through-hole

L 6 **L 6** low temp.

R A S + Right angle support

1 D **Cap**

00 blue
02 green
03 grey
04 yellow
06 white
08 red
09 black
30 ultra blue
40 dusty blue
42 aqua blue
32 mint green
33 tele grey
34 melon
38 noble red
50 metal dark blue
53 metal light grey
57 metal dark grey
58 metal bordeaux

1 P **Cap**

00 blue
03 grey
08 red
09 black

1 K **1 6** + **2 K** **Cap**

00 blue
02 green
03 grey
04 yellow
06 white
08 red
09 black

Bezel



03 grey
06 white
08 red
09 black

1 S 0 9 - . ** **Cap black



H	X *
16.0	8.5
19.0	11.5
22.5	15.0

Standard versions:
3FTL6RAS, 3CTL6RAS,

*Any cap height X from 8.5 to 15.0 mm is available. Please order 1S09-H, where H = X+7.5 mm
Min. order Qty for custom heights is 2.000 pcs. A start-up charge will apply.
3CTL6 also available as right angle switch 3CTL6RAS. Please see multimec basic switch modules.

Ordering example: 3FTL6RAS + 1K0016 + 2K03

mec a/s jan. 2003

mec · Industriparken 23 · P.o. Box 26 · DK-2750 Ballerup · Denmark
Tel.: +45 44 97 33 66 · Fax: +45 44 68 15 14 · Web: www.mec.dk. · E-mail: danmec@mec.dk

multimec® basic switch modules

Through-hole Version

3A		3C	3E	3F		
For 1A/1B/1M	w/LED for 1C/1H			For 1D/1K/1N/1P/1S/1T/ 1U/1V/1X/1GA/1GC	w/LED for 1E/1F/1N/1Q/1R/1S/1X	w/LED for 1K1116/1T/1U/1V
						
Standard Versions						
3ATL6 3ATH9	3ATL600/20/40/80	3CTL6/3CTL9 3CTH9	3ETL9-H* 3ETH9-H*	3FTL6 3FTH9	3FTL600/20/40/80/ 2040/8020/8040	3FTL623/44/88

* 3E available in 6 standard heights: 08.0, 09.5, 10.4, 11.0, 12.0, 15.0 mm
Other heights between 08.0 and 15.0 mm are available upon request

Specials: Gold contacts, quiet version and actuation force other than 3.0N

Surface Mount Versions

3A	3C	3E	3F
			
3ASH9/3ASH9R	3CSH9/3CSH9R	3ESH9/3ESH9R	3FSH9 / 3FSH9R
For 1A/1B/1M			For 1D/1K/1N/1P/1S/1T/ 1U/1V/1X/1GA/1GC

Right Angle Versions

3C	3F
	
3CTL6RAS	3FTL6RAS
	For 1D/1K/1P/1S

multimec® Cross Section

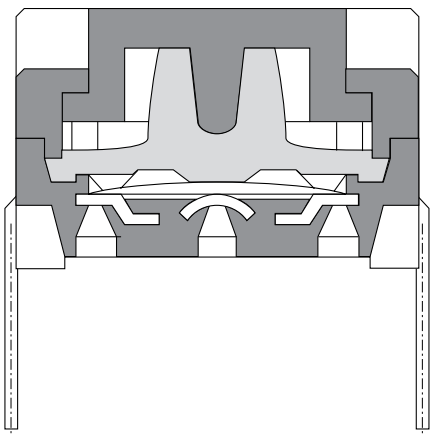

Recommended PCB layout

MULTIMEC
top view



● Optional LED

MULTIMEC
Surface-mount solder pad



MULTIMEC
Right Angle Version
top view



Operating Force
(Typical example)



Circuit diagram



DIMENSIONS (mm) Unless otherwise specified, all tolerances ±0.2

mec Industriparken 23 · P.o. Box 26 · DK-2750 Ballerup · Denmark
Tel.: +45 44 97 33 66 · Fax: +45 44 68 15 14 · E-mail: danmec@mec.dk · www.mec.dk.

mec a/s may 2003

multimec® technical specifications

	Low Temperature Versions		High Temperature Versions	
	Silver	Gold	Silver	Gold
Electrical Specifications				
Contact resistance	<30 m Ω - typically 10m Ω			
Insulation resistance	>10M Ω			
Recommended load	0.5-50mA 24VDC	0.5µ-50mA 24VDC	0.5-50mA 24VDC	0.5µ-50mA 24VDC
Contact bounce	<2mS - typically 0.5mS			
Mechanical Specifications				
Standard actuation force (switch)	3.0N typ.			
Max. actuation force without cap	100N for 10 sec.			
Key travel (switch)	1 mm			
Life time (switch)	>10.000.000 cycles			
Temperature Range				
Working temperature	Min. -40°C Max. +115°C		Min. -40°C Max. +160°C	
Storage temperature	Min. -40°C Max. +115°C		Min. -40°C Max. +160°C	
Soldering IEC 68-2-20	Wave -max. 260°C for max. 10 sec., please refer to usage guidelines		Infrared, vapour phase, wave - max. 260°C for max. 30 sec.	
	Soldering iron - max. 350°C for max. 3 sec. Flux tight.		Soldering iron - max. 350°C for max. 3 sec. Flux tight.	
Environmental Endurance IEC-68-2-3				
Temperature	+40°C			
Humidity	93% RH			
Duration	56 Days			
Temperature Cycling IEC 68-2-14				
Temperature limit	Min. -55°C - Max. +85°C			
Number of cycles	200			
Exposure time at each temperature	10 min.			
Recovery time before measurements	16 hrs.			
Sealing IEC 529	IP-67			
Cleaning	Standard methods such as freon and water			
Material Specifications - Switches				
Housing	PBT UL94VO		PPS UL94VO	
Actuator	PBT UL94VO		PPS UL94VO	
Sealing + spring	Silicone rubber			
Contact spring	Stainless steel + 3µAg	Stainless steel + 3µAg + 1µAu	Stainless steel + 3µAg	Stainless steel + 3µAg +1µAu
Fixed Contacts	SnCu + 2µNI + 3µAg	SnCu + 2µNI + 3µAg+1µAu	SnCu + 2µNI + 3µAg	SnCu + 2µNI + 3µAg +1µAu
Terminals	SnCu + 2µNI + 3µSnPb	SnCu + 2µNI + 3µSnPb	SnCu + 2µNI + 3µSnPb	SnCu + 2µNI + 3µSnPb

Material Specifications - Caps & Bezels

Material	Parts	Temp limit	UL rating
ABS Standard	Standard parts except the below mentioned	Max 65°C	UL94HB
Polycarbonate	All lenses	Max. 85°C	UL94V1
LCP	Actuator of 3E	Max. 160°C	UL94VO
PPS	1S, 2S	Max. 160°C	UL94VO
Polyamide	Actuator of Varimec , 1GA / 1GC	Max. 160°C	UL94VO
Legends Adhesion	ISO Class.: 1/ ASTM Class.: 4B DIN EN ISO 2409		

Specifications are subject to change without notice

mec a/s may 2003

mec Industriparken 23 · P.o. Box 26 · DK-2750 Ballerup · Denmark
Tel.: +45 44 97 33 66 · Fax: +45 44 68 15 14 · E-mail: danmec@mec.dk · www.mec.dk.